

# 1.17 Infinity Roller Blind System

## Technical Information

- 1. Clutch** Smooth, quiet, direct drive clutch for everyday use. Suits 38mm and 50mm Tubes.
- 2. Idle end plug** Pin ends with extended stroke/plunge for easier installation and glass filled nylon construction ensures longevity.
- 3. Tube** Aluminium alloy tube, with multiple cloth fixing. 38mm standard for widths up to 2199mm / 50mm for widths over 2200mm.
- 4. Brackets** Colour coordinated pressed powdercoated steel.
- 5. Base rail** Extruded aluminium ellipse, available in black, white and anodised.
- 6. Chain** No.10 chain in either nylon bead chain or stainless steel ball chain.

**PLEASE NOTE:** Infinity Roller Blind System comes with a 3 year warranty.

## Dimensions & Limitations

	Standard
MINIMUM WIDTH*	600mm
MAXIMUM WIDTH*	3000mm
MINIMUM DROP*	500mm
MAXIMUM DROP*	3600mm

**\* Recommended Tolerances.**

## Standard Base Rail




**31.5mm Elliptic Bottom Rail**  
**NOTE:** Dimensions relate to height of Base Rail.

## Componentry




**NB. 38mm tube suitable for widths up to 2199mm**




**NB. 50mm tube suitable for widths over 2200mm**

## Assembly

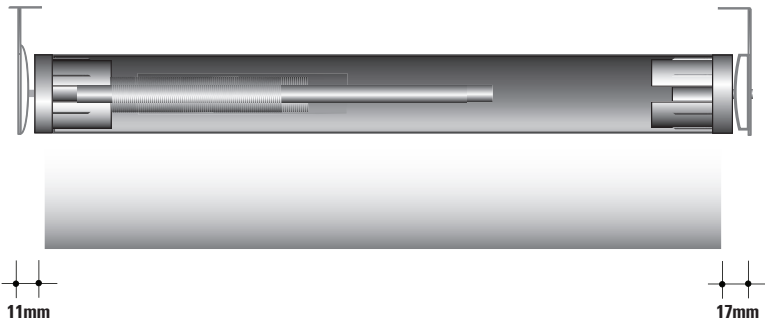

## Brackets



## References

