

2.7 Double Glazed (Interstitial) Venetian System

Technical Information

Dimensions & Limitations

1. Tilt shaft connection cable

2. Head rail

3. Top end caps

4. Slat/coil

5. Tilt Shaft

6. Control knob

7. Ladder

8. Bottom rail

9. Bottom rail end caps

10. Bottom rail buttons

11. Brackets
- Cast aluminium shaft connector with flexible PVC covered, nickel plated woven steel cable core.

Roll-formed from 0.05mm aluminium/zinc coated steel with a thermoset polymer coating.

Colour coordinated. Moulded from U.V. resistant polypropylene.

Manufactured from 0.175 thick high tensile aluminium alloy (5754), which is crowned and flexible to bend 180° around a 12.5mm radius without incurring any permanent deformation.

Galvanised Steel HEX Shaft.

Moulded U.V. resistance acetal knob with cast aluminium shaft connector, and covered with flexible PVC nickel plated woven steel cable core.

2 ply spaced ladder in woven polyester.

Roll-formed from 0.05mm aluminium/zinc coated steel with a thermoset polymer coating. Full enclosed “D” section containing both ladder and cord, preventing them from being exposed.

Colour coordinated. Moulded from U.V. resistant acetal.


Colour coordinated. Moulded from U.V. resistant acetal.

Pressed zinc coated steel with spring loaded locking mechanism.


* Please note for headbox component breakdown refer to 25mm spec. 2.01

SLAT SIZE	25mm
MINIMUM WIDTH	200mm
MAXIMUM WIDTH	2500mm
MAXIMUM DROP	3300mm
MAXIMUM AREA	9m²
STACK HEIGHT	(0.034 x drop + 45mm)


Componentry

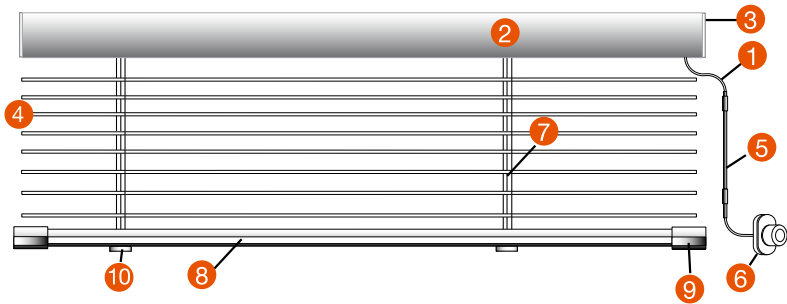

Brackets



Control Knob Options

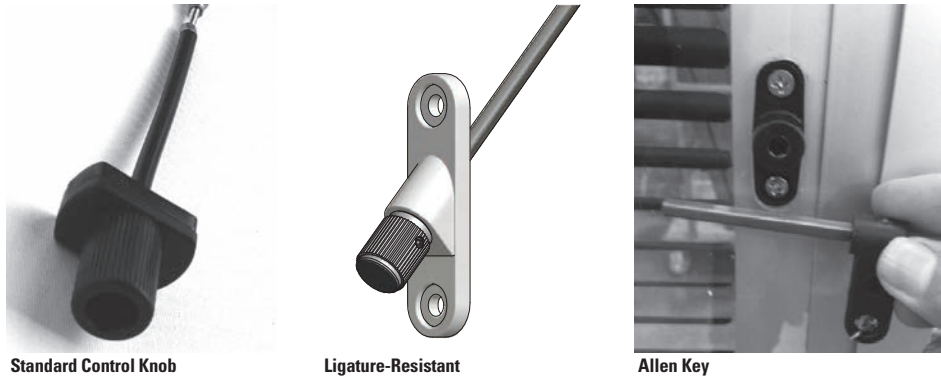

References

